



线槽 | 智能照明灯 | 冷压端子 | 端子台 | 导轨 | 管件接头 | 地零排 | 绝缘母线夹 | 拖链 | 结束带
编织网管 | 热缩管 | Pu气管 | 扣件保护 | 标识类 | 航空插头 | 重载连接器 | 工具系列 | 风机系列

Wenbuluo

江苏稳不落配线器材有限公司
Wenbuluo Electrical Co., Ltd

0512-36602880

www.wenbuluo.com www.wenbuluo.cn

江苏省苏州市昆山市开发区熊庄路25号

Pu气管系列

世界级安全配电器材全品类引领者


Wenbuluo

2025 V.9.0



200+权威认证筑就品质长城
ISO9001质量管理体系 | 高新技术认证 | CE/UL/ROHS国际认证矩阵

M-01 PU气管

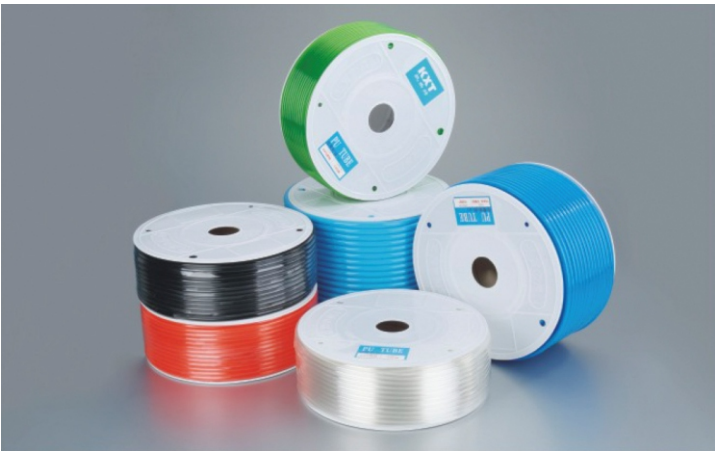

颜色/Color

Blue 蓝色	Transparent 透明	Orange 橘黄色	Black 黑色
Green 绿色	Yellow 黄色	Red 红色	

技术参数/Specifications

材料/Material	聚氨酯/Polyurethane
流体/Fluid	空气,水/air,water
环境及流体温度/OperatingTemp	-10℃- +70℃

产品特性/ProductCharacteristic

具有极好的柔软性，弯曲半径极小;良好的抗震性;质轻;工作温度及工作压力范围宽。有极好的化学性能，压力损失极小;硬度恒定，使用寿命长。无毒，无味，可按需求定制颜色，易于管路识别，符合ROHS环保要求。

Has excellent flexibility,the bevelling radius is small;Good anti-knockingproperty;The nature is light;The operating temperature and the working pressure scope is wide;Has the excellent chemical properties,the pressure loss is minimum; Degree of hardness is constant,the service life is long;Non-toxic, tasteless;Custom-made coloris doable, easypipeline recognition. Conformto the ROHSEnvironmental protection requirement

产品用途/ProductUse

工业机器人气动工具装配厂气压工具带压输送管道过水及其它流体;可用作真空吸管;金属及电子产品的防护外套。装饰品(如提手等)。

Has excellent flexibility,the bevelling radius is small;Good anti-knockingproperty;The nature is light;The operating temperature and the working pressure scope is wide;Has the excellent chemical properties,the pressure loss is minimum; Degree of hardness is constant,the service life is long;Non-toxic, tasteless;Custom-made coloris doable, easypipeline recognition. Conformto the ROHSEnvironmental protection requirement

产品编码 Model		内径1.D. Inner diameter (mm)	外径O.D. Outer diameter (mm)	长度 Length (m)	工作压力 Working Pressure (kgf/cm ²)	爆破压力 DisruptivePressure (kgf/cm ²)	弯曲半径 Bevelling Padus (mm)	重量 Weight (kg/Reel)
公制 Metric System	TU0425 -200M	2.5	4	200	10	32	10	2.32
	TU0640 -200M	4	6	200	8	24	15	4.32
	TU0850 -100M	5	8	100	10	32	20	4.22
	TU0855 -100M	5.5	8	100	8	24	20	3.72
	TU1065 -100M	6.5	10	100	8	24	25	6.05
	TU1280 -100M	8	12	100	8	24	35	8.22
	TU1410 -100M	10	14	100	8	24	45	9.41
	TU1612 -100M	12	16	100	8	24	70	11.34
	TU1613 -100M	13	16	100	6	18	80	8.9
	TU1/8 -200M	2	3.2	200	10	32	8	1.58
英制 British System	TU1/4 -200M	4.57	6.35	200	8	24	15	4.22
	TU3/8 -100M	6.5	9.6	100	8	24	25	5.1
	TU1/2 -100M	9.6	12.6	100	8	24	35	6.71

各种交货规格:可按需定制外径从2mm到 p p 的任意规格.Vshflllf dwr q=xwhugldp hwhuudqj h p p w p p

M-02 PU弹管



颜色/Color


Blue 蓝色	Transparent 透明	Orange 橘黄色	Black 黑色
Green 绿色	Yellow 黄色	Red 红色	

技术参数/Specifications

材料/Material	聚氨酯/Polyurethane
流体/Fluid	空气,水/air,water
环境及流体温度/OperatingTemp	-10℃- +70℃


产品特性/ProductCharacteristic

除具有PU管的特性外，还具有:弹性好，伸缩自如，使用方便，节省空间。吸收冲击及减少管路摩擦，规格及尺寸可按需求定制。
Besides the PU tube characteristic. it also has: Good elasticity,is easy to operate, saves the space.Absorbing impact and reduces the pipeline to rub.Custom-made specification and size are doable.

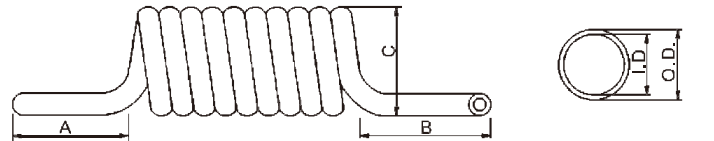

A,B,C的尺寸均可按客户需求定制. The size of A,B,C may be custom-made

型号名称/Product CodeSyetem

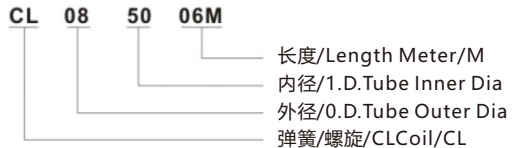


产品编码 Model	内径1.D. Inner diameter (mm)	外径O.D. Outer diameter (mm)	长度 Length (m)	工作压力 Working Pressure (kgf/cm ²)	爆破压力 DisruptivePressure (kgf/cm ²)	工作温度范围 Working temperature Range (°C)
CL0850 -06M -□□ -□□	5	8	6	8	24	-20℃ - +70℃
CL0850 -09M -□□ -□□	5	8	9	8	24	
CL0850 -12M -□□ -□□	5	8	12	8	24	
CL0850 -15M -□□ -□□	5	8	15	8	24	
CL1065 -06M -□□ -□□	6.5	10	6	8	24	
CL1065 -09M -□□ -□□	6.5	10	9	8	24	
CL1065 -12M -□□ -□□	6.5	10	12	8	24	
CL1065 -15M -□□ -□□	6.5	10	15	8	24	
CL1280 -06M -□□ -□□	8	12	6	8	24	
CL1280 -09M -□□ -□□	8	12	9	8	24	
CL1280 -12M -□□ -□□	8	12	12	8	24	
CL1280 -15M -□□ -□□	8	12	15	8	24	

M-03 PU 夹纱管



产品特性Product Characteristic
具有极好的弱软性和化学性能，良好的抗震性;质轻;压力损失小;硬度恒定。工作压力是单层PU管的1.8倍，使用寿命是单层PU管的二倍以上，无毒，无味。可按需求定制颜色，易于管路识别，符合ROHS环保要求。
Has the excellent pliability and the chemical properties good anti-knock-ingproperty;thenatureis light;The pressure loss is minimum; Degree of hard nessis constant. Working pressure is single-layer PU tube's 1.8 times, the service life is above single-layer PU-tube's two times.Non-toxic, tasteless.Custom-made coloris doable,easy pipelinere cognition.Conform to the ROHS environmental protection requirement.

产品用途/ProductUse
工业机器人,气动工具，装配厂气压工具，带压输送管道-过水及其它流体，车辆维修及房屋喷漆。
Industry robot, pneumatic tool,assembly plant barometrictool,and the duct with pressure.Transport water and otherliquid.Vehicles service and house painting.

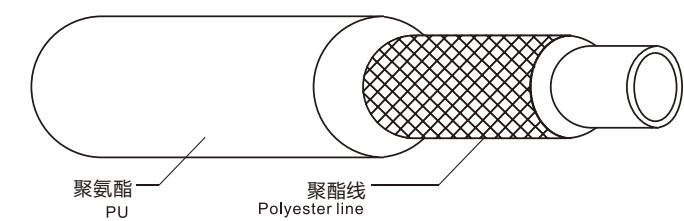

产品编码 Model	内径1.D. Inner diameter (mm)	外径O.D. Outer diameter (mm)	长度 Length (m)	工作压力 Working Pressure (kgf/cm²)	爆破压力 DisruptivePressure (kgf/cm²)	弯曲半径 Bevelling Padus (mm)	重量 Weight (kg/Reel)
TUB1280 -100M	8	12	100	15	45	35	8.22
TUB14.5 × 9.5 -100M	9.5	14.5	100	15	45	45	11.8
TUB1612 -100M	12	16	100	15	45	60	11.5
TUB1813 -100M	13	18	100	15	45	70	15

颜色/Color

Blue
蓝色

Transparent
透明

Orange
橘黄色

Black
黑色

Green
绿色


Yellow
黄色

Red
红色


技术参数/Specifications

材料/Material	聚氨酯/Polyurethane
流体/Fluid	空气,水/air,water
环境及流体温度/OperatingTemp	-10℃- +70℃

型号名称/Product CodeSyetem

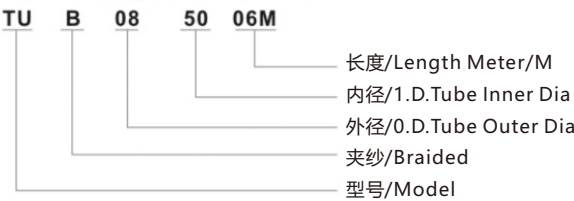

各种交货规格:可按需定制外径从8.0mm到35mm的任意规格
Specification:outer diameterrange 8.0mm to 35mm.

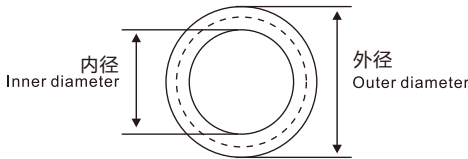

M-04 尼龙软管



产品特性Product Characteristic
耐多种化学物质的腐蚀;耐磨损。表面光滑，尺寸稳定;渗透率小，阻力小，能防止生锈和结垢淤积。电阻极大，可以作为绝缘体使用，使用寿命很长，甚至几十年;耐高温性好，可在-40℃到+100℃的环境下使用，可配接头形式:卡套式，竹节式，扣压式和快插式多种颜色可供选择;易于管路识别。
Bears many kinds of chemical substances erode; with good wearability.The surfaceis smooth,the size is stableth epermeability coefficieentis small;the resistance is small,can preventto rust and silts up.The resistance is enorm-ous,may use as insulator.The service life is very long,evenseveral dozens years;High temp erature resistarrtrnay work under environment-40℃-+100℃.Thejoint typewith can mach:The sleeve chuck type,the bamboonobe type,the with hold type and the quick insert typeMany colors for choice,for easy pipeline recognition.

产品用途/Product Use
输送压缩空气，水，燃料油，化学溶剂，液态食品等。汽车，发动机及其它工程运输和装载机械。
Transport compressed air,water,bunker oil,chemistry solvent,liquid state food and so on;Being used for automobile,engine,other project transporta-tion and loading machinery.easy pipeline recognition.

产品编码 Model	内径1.D. Inner diameter (mm)	外径O.D. Outer diameter (mm)	工作压力 Working Pressure (kgf/cm²)	爆破压力 DisruptivePressure (kgf/cm²)	弯曲半径 Bevelling Padus (mm)
PA0420	2	4	45	135	30
PA0530	3	5	34	102	35
PA0640	4	6	27	81	40
PA0860	6	8	19	57	50
PA1075	7.5	10	15	45	60
PA1080	8	10	15	45	65
PA1290	9	12	19	57	70
PA1410	10	14	19	57	100
PA1612	12	16	19	57	130

颜色/Color

Blue
蓝色

Transparent
透明

Orange
橘黄色

Black
黑色

Green
绿色


Yellow
黄色

Red
红色

技术参数/Specifications

材料Material	尼龙Polyamide
流体Fluid	空气水 Air, Water
爆破压力Burst Pressure(20℃)	60bar
最高使用压力Operation Pressure	45kgf/cm²
环境及流体温度OperatingTemp	-40℃- +100℃

型号名称/Product CodeSyetem

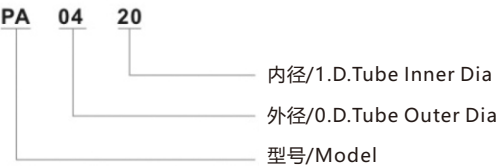

M-05 尼龙6管



产品特性/Product Characteristic
防腐，抗磨损性能良好，使用寿命长;耐温性好;表面光滑尺寸稳定，渗透率小;能防止生锈和结垢淤积，阻力小;可在-40℃-+100℃的环境下工作。颜色和规格可按需求定制。
Anti-corrosion,abrasion resistance,long service life,Goodheat-resistance:Prevent to be rusted or silted upresistanceis minimum,Smoothly surface,stable sizesmall permeability coefficient. Working temperature rangeis -40 to+100 degree.Custom-made color and the diameteris available.

产品用途/Product Use
工程运输和装载机械;输送压缩空气，水，燃料油，化学溶剂等，Engineering transportation and loading machinery;Transport-compressed air ,water,bunker oil,solvent.etc.

产品编码 Item No.	公制尺寸Metric Measurement								
	PA6 -0420	PA6 -0530	PA6 -0640	PA6 -0860	PA6 -1075	PA6 -1080	PA6 -1290	PA6 -1410	PA6 -1612
内径1.D.(mm)	2	3	4	6	7.5	8	9	10	12
外径O.D.(mm)	4	5	6	8	10	10	12	14	16
工作压力 Working Pressure:19.0kgfcm ² -45.0kgfcm ²					弯曲半径 Bevelling Radius:30.0kgfcm ² -130kgfcm ²				
爆破压力 DisruptivePressure:45.0kgfcm ² -135.0kgfcm ²					工作温度范围 Temperature Range: -40℃ -+100℃				

M-06 尼龙弹簧管



产品特性/Product Characteristic
除具有尼龙管的特性外，还具有:压力损耗小;制动反应快。使用后回复性好;耐磨损使用寿命长。
Besides has the nylon tube characteristic,it also has:The loss of pressure is small.The brake reacts quickly.The good reversion after use.The good wearability and the service life is long.

产品用途/Product Use
鞍式半挂车，牵引拖车气制动系统的联接管路。
The gas braking system's joint pipeline of saddle type semitrailer and hauling trailer.

型号名称/Product Code System

NY	CL	08	60	63M
				长度/Length Meter/M
				内径/1.D.Tube Inner Dia
				外径/O.D.Tube Outer Dia
				弹簧/Coil
				型号/Model

产品编码 Item No.	公制尺寸Metric Measurement		
	NYCL0860 -03M	NYCL1070 -03M	NYCL1290 -03M
内径I.D.(mm)	6	7	9
外径O.D.(mm)	8	10	12
长度 Length (m)	3M 6M 9M 12M 15M	工作压力 Working Pressure:19.0kgfcm ²	
爆破压力 Disruptive Pressure:57.0kgfcm ²		工作温度范围 Temperature Range: -40℃ - +100℃	

M-07 PE 管



产品特性/Product Characteristic
PE管可耐多种化学介质的侵蚀;无毒，无味，无结层，不滋生细菌，使用寿命长。韧性好，耐冲击，强度高。
PE hose can resistant many kinds of chemical corrosion,non-toxic,tasteless.long service time,excellent in cushion effect.

产品用途/Product Use
自来水管网系统;饮用水管道;化工，化纤，食品，林业，印染，制药，轻工，造纸冶金等工业的料液输送管道;农用灌溉管道;邮电通讯线路，电力电缆保护套管;矿山砂浆输送管道。Tap-water hose net system;drinking water pipeline;liquid transport pipeline of chemical industry,chemical fibre,food,forestry, printing and dyeing,pharmacy. light industry,papermaking,metallurgy and so on;agriculture irrigation pipeline; post and telecommunication line;electric wire safe guard cover hose; minetransport pipeline for sandpulp.

产品编码 Item No.	公制 Metric Measurement						英制 British Measurement			
	PE0420	PE0640	PE0860	PE1080	PE1290	PE1411	PE1/8	PE1/4	PE3/8	PE1/2
内径1.D.(mm)	2	4	6	8	9	11	1.57	4.3	6.35	9.65
外径O.D.(mm)	4	6	8	10	12	14	1/8	1/4	3/8	1/2
常温下弯曲半径 Bevelling Radius (mm)	25	35	55	65	80	80	13	32	50	64

M-08 TPEE管



产品特性/Product Characteristic
具有橡胶的弹性，工程塑料的强度及很好的韧性，低温-40℃下保持其弹性，高温+110℃下仍能保留良好的机械性能，对蠕变，冲击和挠曲疲劳具有极高的抗阻力。可抵抗油...燃料;溶剂及多种其他化学品。硬度范围约:40D到70D。
Characteristic:Has the rubber elasticity,the engineering plastics intensity and the excellent toughness.Maintained its elasticity under the low temperature-40℃and ~till retained the good mechanical property under the high temperature+110℃.To the slow change,the impact and the bending fatigue have the extremely high resistance,may resist the oil,the fuel; the solvent and many kinds of other chemicals.

产品用途/Product Use
精密电缆，汽车油管，溶剂管及各类导管。
Precision cables, automotive fuel lines, solvent hoses, and various types of tubing.

TPEE 08 60 100M

			长度/Length Meter/M
			内径/1.D.Tube Inner Dia
			外径/O.D.Tube Outer Dia
			型号/Model

产品编码 Item No.	公制尺寸Metric Measurement			
	TPEE0860 -100M	TPEE1080 -100M	TPEE1210 -100M	TPEE1412 -100M
内径1.D.(mm)	6	8	10	12
外径O.D.(mm)	8	10	12	14
长度 Length (m)	100M	100M	100M	100M