


# PU气管系列

为中大型智能装备制造企业提供一站式配电器材解决方案

Wenbuluo

2026 V.1.0

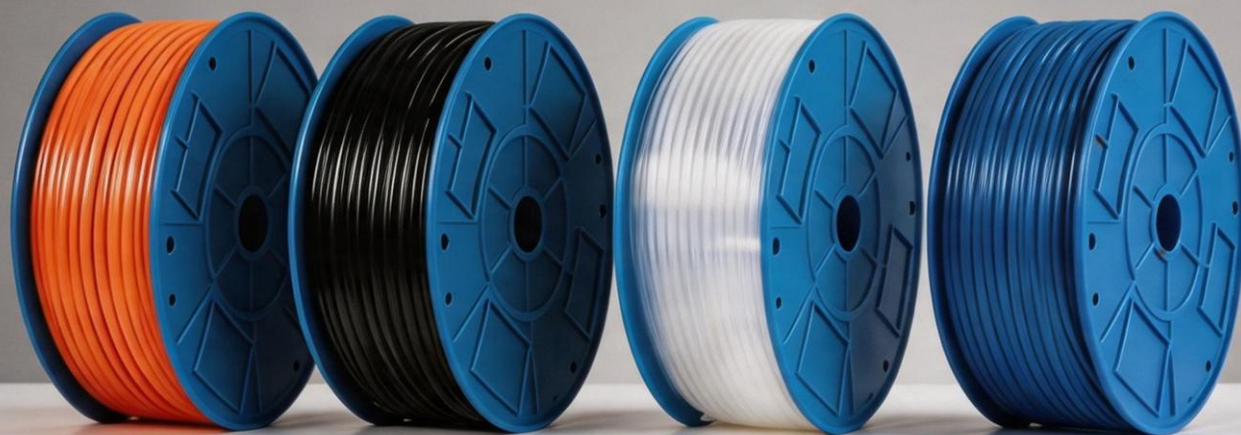



## 气动系列



L-01  
PU 气管



L-02  
PU 弹管



L-03  
PU 夹纱管



L-04  
尼龙软管



L-05  
ZP 系列接头



L-06  
TP 系列接头



L-07  
TS 系列接头



L-08  
自锁接头




L-09  
接头通用附件



L-10  
气枪

## L-01 PU气管

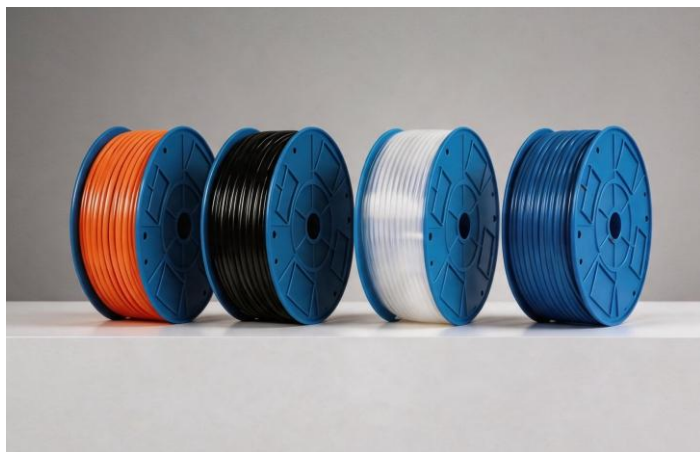

## 颜色/Color

Blue 蓝色	Transparent 透明	Orange 橘黄色	Black 黑色
Green 绿色	Yellow 黄色	Red 红色	

## 技术参数/Specifications

材料/Material	聚氨酯/Polyurethane
流体/Fluid	空气,水/air,water
环境及流体温度/OperatingTemp	-10°C - +70°C

## 产品特性/ProductCharacteristic

具有极好的柔软性,弯曲半径极小;良好的抗震性;质轻;工作温度及工作压力范围宽。有极好的化学性能,压力损失极小;硬度恒定,使用寿命长。无毒,无味,可按需求定制颜色,易于管路识别,符合ROHS环保要求。

Has excellent flexibility,the bevelling radius is small;Good anti-knockingproperty;The nature is light;The operating temperature and the working pressure scope is wide;Has the excellent chemical properties,the pressure loss is minimum; Degree of hardness is constant,the service life is long;Non-toxic, tasteless;Custom-made coloris doable, easypipeline recognition. Conformto the ROHSEnvironmental protection requirement

## 产品用途/ProductUse

工业机器人气动工具装配厂气压工具带压输送管道;过水及其它流体;可用作真空吸管;金属及电子产品的防护外套。装饰品(如提手等)。

Has excellent flexibility,the bevelling radius is small;Good anti-knockingproperty;The nature is light;The operating temperature and the working pressure scope is wide;Has the excellent chemical properties,the pressure loss is minimum; Degree of hardness is constant,the service life is long;Non-toxic, tasteless;Custom-made coloris doable, easypipeline recognition. Conformto the ROHSEnvironmental protection requirement

产品编码 Model		内径I.D. Inner diameter (mm)	外径O.D. Outer diameter (mm)	长度 Length (m)	工作压力 Working Pressure (kgf/cm <sup>2</sup> )	爆破压力 Disruptive Pressure (kgf/cm <sup>2</sup> )	弯曲半径 Bevelling Padius (mm)	重量 Weight (kg/Reel)
公制 Metric System	TU0425 - 200M	2.5	4	200	10	32	10	2.32
	TU0640 - 200M	4	6	200	8	24	15	4.32
	TU0850 - 100M	5	8	100	10	32	20	4.22
	TU0855 - 100M	5.5	8	100	8	24	20	3.72
	TU1065 - 100M	6.5	10	100	8	24	25	6.05
	TU1280 - 100M	8	12	100	8	24	35	8.22
	TU1410 - 100M	10	14	100	8	24	45	9.41
	TU1612 - 100M	12	16	100	8	24	70	11.34
	TU1613 - 100M	13	16	100	6	18	80	8.9
英制 British System	TU1/8 - 200M	2	3.2	200	10	32	8	1.58
	TU1/4 - 200M	4.57	6.35	200	8	24	15	4.22
	TU3/8 - 100M	6.5	9.6	100	8	24	25	5.1
	TU1/2 - 100M	9.6	12.6	100	8	24	35	6.71

各种交货规格:可按需定制外径从2mm到30mm的任意规格.Specification:outer diameter range 2mm to 30mm

## L-02 PU弹管



### 颜色/Color

Blue 蓝色	Transparent 透明	Orange 橘黄色	Black 黑色
Green 绿色	Yellow 黄色	Red 红色	


### 技术参数/Specifications

材料/Material	聚氨酯/Polyurethane
流体/Fluid	空气,水/air,water
环境及流体温度/OperatingTemp	-10°C-+70°C


### 产品特性/ProductCharacteristic

除具有PU管的特性外,还具有:弹性好,伸缩自如,使用方便,节省空间。吸收冲击及减少管路摩擦,规格及尺寸可按需求定制。

Besides the PU tube characteristic, it also has: Good elasticity, is easy to operate, saves the space. Absorbing impact and reduces the pipeline to rub. Custom-made specification and size are doable.

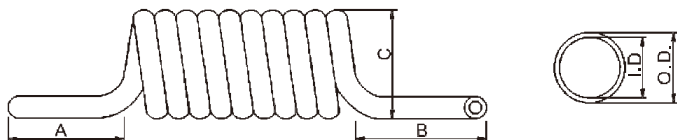

### 型号名称/Product CodeSystem

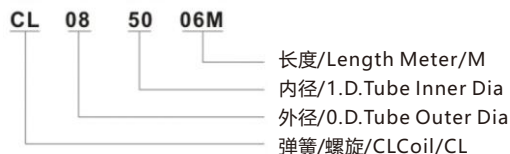

A, B, C 的尺寸均可按客户需求定制。The size of A, B, C may be custom-made

产品编码 Model	内径1.D. Inner diameter (mm)	外径O.D. Outer diameter (mm)	长度 Length (m)	工作压力 Working Pressure (kgf/cm <sup>2</sup> )	爆破压力 Disruptive Pressure (kgf/cm <sup>2</sup> )	工作温度范围 Working temperature Range (°C)
CL0850 -06M -□□ -□□	5	8	6	8	24	-20°C - +70 °C
CL0850 -09M -□□ -□□	5	8	9	8	24	
CL0850 -12M -□□ -□□	5	8	12	8	24	
CL0850 -15M -□□ -□□	5	8	15	8	24	
CL1065 -06M -□□ -□□	6.5	10	6	8	24	
CL1065 -09M -□□ -□□	6.5	10	9	8	24	
CL1065 -12M -□□ -□□	6.5	10	12	8	24	
CL1065 -15M -□□ -□□	6.5	10	15	8	24	
CL1280 -06M -□□ -□□	8	12	6	8	24	
CL1280 -09M -□□ -□□	8	12	9	8	24	
CL1280 -12M -□□ -□□	8	12	12	8	24	
CL1280 -15M -□□ -□□	8	12	15	8	24	

## L-03 PU 夹纱管



## 颜色/Color

Blue 蓝色	Transparent 透明	Orange 橘黄色	Black 黑色
Green 绿色	Yellow 黄色	Red 红色	

## 技术参数/Specifications

材料/Material	聚氨酯/Polyurethane
流体/Fluid	空气,水/air,water
环境及流体温度/OperatingTemp	-10°C - +70°C

## 产品特性Product Characteristic

具有极好的弱软性和化学性能，良好的抗震性;质轻;压力损失小;硬度恒定。工作压力是单层PU管的1.8倍，使用寿命是单层PU管的二倍以上，无毒，无味。可按需求定制颜色，易于管路识别，符合ROHS环保要求。


Has the excellent pliability and the chemical properties good anti-knocking property; the nature is light; The pressure loss is minimum; Degree of hardness is constant. Working pressure is single-layer PU tube's 1.8 times, the service life is above single-layer PU-tube's two times. Non-toxic, tasteless. Custom-made color is doable, easy pipeline recognition. Conform to the ROHS environmental protection requirement.

## 产品用途/Product Use



工业机器人,气动工具,装配厂气压工具,带压输送管道-过水及其它流体,车辆维修及房屋喷漆。

Industry robot, pneumatic tool, assembly plant barometric tool, and the duct with pressure. Transport water and other liquid. Vehicles service and house painting.

## 型号名称/Product Code System

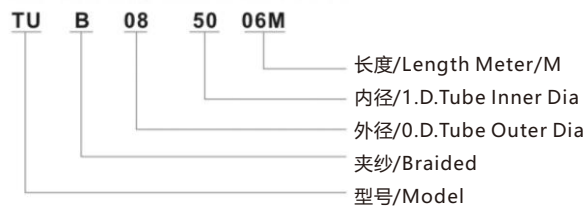

各种交货规格:可按需定制外径从8.0mm到35mm的任意规格  
Specification: outer diameter range 8.0mm to 35mm.

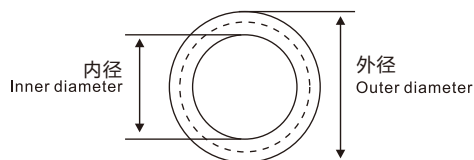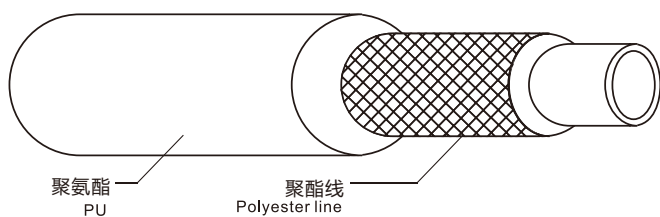

产品编码 Model	内径1.D. Inner diameter (mm)	外径O.D. Outer diameter (mm)	长度 Length (m)	工作压力 Working Pressure (kgf/cm <sup>2</sup> )	爆破压力 Disruptive Pressure (kgf/cm <sup>2</sup> )	弯曲半径 Bevelling Padus (mm)	重量 Weight (kg/Reel)
TUB1280 -100M	8	12	100	15	45	35	8.22
TUB14.5 × 9.5 -100M	9.5	14.5	100	15	45	45	11.8
TUB1612 -100M	12	16	100	15	45	60	11.5
TUB1813 -100M	13	18	100	15	45	70	15

## L-04 尼龙软管



### 颜色/Color

Blue 蓝色	Transparent 透明	Orange 橘黄色	Black 黑色
Green 绿色	Yellow 黄色	Red 红色	

### 技术参数/Specifications

材料Material	尼龙Polyamide
流体Fluid	空气水 Air, Water
爆破压力Burst Pressure(20°C)	60bar
最高使用压力Operation Pressure	45kgf/cm <sup>2</sup>
环境及流体温度Operating Temp	-40°C- +100°C

### 产品特性Product Characteristic

耐多种化学物质的腐蚀;耐磨损。表面光滑,尺寸稳定;渗透率小,阻力小,能防止生锈和结垢淤积。电阻极大,可以作为绝缘体使用,使用寿命很长,甚至几十年;耐高温性好,可在-40°C到+100°C的环境下使用,可配接头形式:卡套式,竹节式,扣压式和快插式多种颜色可供选择,易于管路识别。

Bears many kinds of chemical substances erode; with good wearability. The surface is smooth, the size is stable; permeability coefficient is small; the resistance is small, can prevent rust and silts up. The resistance is enormous, may use as insulator. The service life is very long, even several dozens years; High temperature resistant may work under environment -40°C- +100°C. The joint type with can match: The sleeve chuck type, the bamboo node type, the with hold type and the quick insert type. Many colors for choice, for easy pipeline recognition.

### 产品用途/Product Use

输送压缩空气,水,燃料油,化学溶剂,液态食品等。汽车,发动机及其它工程运输和装载机械。

Transport compressed air, water, bunker oil, chemistry solvent, liquid state food and so on; Being used for automobile, engine, other project transportation and loading machinery. easy pipeline recognition.

### 型号名称/Product Code System



产品编码 Model	内径I.D. Inner diameter (mm)	外径O.D. Outer diameter (mm)	工作压力 Working Pressure (kgf/cm <sup>2</sup> )	爆破压力 Disruptive Pressure (kgf/cm <sup>2</sup> )	弯曲半径 Bevelling Padus (mm)
PA0420	2	4	45	135	30
PA0530	3	5	34	102	35
PA0640	4	6	27	81	40
PA0860	6	8	19	57	50
PA1075	7.5	10	15	45	60
PA1080	8	10	15	45	65
PA1290	9	12	19	57	70
PA1410	10	14	19	57	100
PA1612	12	16	19	57	130

## L-05 ZP系列

## 插管式气动管接头

L

ZPC螺纹直通 	ZPLL型螺纹弯通 	ZPB T型螺纹正三通 	ZPD T型螺纹侧三通 
ZPXY型螺纹三通 	ZPCF内螺纹直通 	ZPH外六角接头 	ZSL节流阀标准型 
ZPLF内螺纹弯通 	ZPKD螺纹五通 	ZPLL加长L型螺纹弯通 	ZPMF隔板内螺纹直通 
ZPM隔板直通 	ZHVFF手控阀 	ZLSA管道阀 	ZPU直通 
TZPET型三通 	ZPVL型弯通 	ZPYY型三通 	ZPZA十字四通 
ZPK五通 	ZPG直通变径 	ZPKG五通变径 	ZPEND T型三通变径 
ZPENT型三通变径 	ZPNY型三通变径 		

L-06 TP系列

插管式气动管接头

<p>TPC螺纹直通</p> 	<p>TPC-G螺纹直通</p> 	<p>TPOC圆螺纹直通</p> 	<p>TPOC-G圆螺纹直通-G螺纹</p> 
<p>TPCF内螺纹直通</p> 	<p>TPCF-G内螺纹直通-G螺纹</p> 	<p>TPBT型螺纹正三通</p> 	<p>TPB-GT型螺纹正三通-G螺纹</p> 
<p>TPDT型螺纹侧三通</p> 	<p>TPD-GT型螺纹侧三通-G螺纹</p> 	<p>TPLL型螺纹弯通(亚德客型)</p> 	<p>TPL-GL型螺纹弯通-G螺纹</p> 
<p>TPLL加长L型螺纹弯通</p> 	<p>TPLL-G加长L型螺纹弯通-G螺纹</p> 	<p>TPLFL型内螺纹弯通</p> 	<p>TPLF-GL型内螺纹弯通-G螺纹</p> 
<p>TPXY型螺纹三通</p> 	<p>TPX-GY型螺纹三通</p> 	<p>TPKD螺纹五通</p> 	<p>TPKD-G螺纹五通-G螺纹</p> 
<p>TPH外六角</p> 	<p>TPH-G外六角-G螺纹</p> 	<p>TPMF隔板内螺纹直通</p> 	<p>TPMF-G隔板内螺纹直通-G螺纹</p> 
<p>TPLM隔板弯通</p> 	<p>TPM 隔板直通</p> 	<p>TBUC球阀</p> 	<p>TPYY型三通</p> 

## L-06 TP系列

## 插管式气动管接头

<p>TPWY型三通变径</p> 	<p>TPVL型弯通</p> 	<p>TPE T型三通</p> 	<p>TPEGDT型三通变径</p> 
<p>TPEGT型三通变径</p> 	<p>TPU直通</p> 	<p>TPG直通变径</p> 	<p>TPZA十字四通</p> 
<p>TPK五通</p> 	<p>TPKG五通变径</p> 	<p>TPP管塞</p> 	<p>ZPYJ插入型Y三通</p> 

## L-07 节流阀

<p>TPA管道阀</p> 	<p>TSL节流阀标准型</p> 
<p>TSL-G节流阀标准型-G螺纹</p> 	<p>TPTL推锁节流阀</p> 





L-08 自锁接头

<p>SM</p> 	<p>SF</p> 	<p>SH</p> 	<p>SP</p> 
<p>PM</p> 	<p>PF</p> 	<p>PH</p> 	<p>PP</p> 
<p>SMV/SMY</p> 	<p>SML</p> 	<p>OSMV(内 Inner thread)</p> 	<p>OSMY(Outer thread)</p> 
<p>OSP20+OPP20</p> 	<p>OSH20+OPH20</p> 	<p>OSM20+OPM20</p> 	<p>OSF20+OPF20</p> 

## L-09 接头通用附件

<p>宝塔PCF系列</p> 	<p>宝塔二通系列</p> 	<p>宝塔三通T型系列</p> 	<p>宝塔四通系列</p> 
<p>宝塔PL系列</p> 	<p>对丝系列</p> 	<p>内外接头系列</p> 	<p>补芯系列</p> 
<p>内接系列</p> 	<p>内螺弯头系列</p> 	<p>外螺弯头系列</p> 	<p>内螺三通系列</p> 
<p>外螺三通系列</p> 	<p>内螺四通系列</p> 	<p>铜单向阀系列</p> 	<p>铜堵头系列</p> 

L-10 气枪

<p>AR-TS</p> 	<p>AR-TS-L</p> 
<p>气枪Airgun</p> 	<p>气枪Airgun</p> 



线槽 | 智能照明灯 | 冷压端子 | 端子台 | 导轨 | 管件接头 | 地零排 | 绝缘母线夹 | 拖链 | 结束带  
 编织网管 | 热缩管 | Pu气管 | 扣件保护 | 标识类 | 航空插头 | 重载连接器 | 工具系列 | 风机系列

Wenbuluo

江苏稳不落配线器材有限公司  
 Wenbuluo Electrical Co., Ltd

☎ 0512-36602880

🌐 [www.wenbuluo.com](http://www.wenbuluo.com) [www.wenbuluo.cn](http://www.wenbuluo.cn)

📍 江苏省苏州市昆山市开发区熊庄路25号